





REF. 112



Waterfall in stainless steel AISI 316L (Marine quality). Polished finish.



Screws Included



Earth Connection

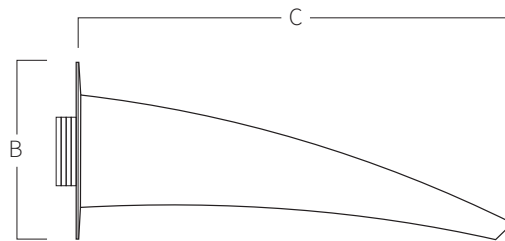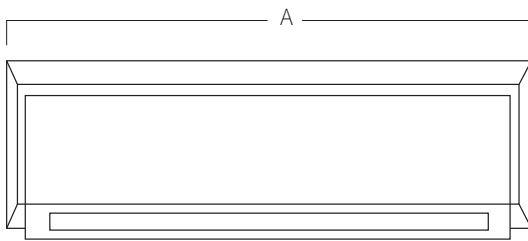

A	B	C
300 11,81	110 04,33	270 10,63
500 19,69	110 04,33	270 10,63
700 27,56	110 04,33	270 10,63
1000 39,37	110 04,33	270 10,63

Measures in mm
Mesures in inch

MOUNTING SYSTEM

1) Screw at the wall with a 1 1/2" male fitting (width 300/500) and 2" male fitting (width 700/1000).

2) Connect the earth connection.

3) Fix with the 4 screws.

a) Impulsion tube Ø50mm (width 300/500) and Ø63mm (width 700/1000).

b) Self-priming pump:


112 (300): 0,50hp - 8m³/h (Ref. AQA-B8).

112 (500): 0,80hp - 10m³/h (Ref.AQA-B10).

112 (700): 1hp - 17,3m³/h (Ref.AQA-B17)

112 (1000): 1,5hp - 21,5m³/h (Ref. B21).

c) Suction tube 2" (Ø63mm).

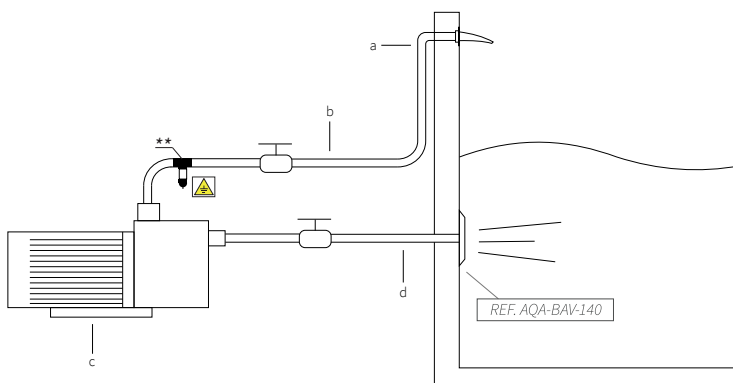

*Pneumatic or electric button to be defined in work.

**AQA recommends to install a POOL PROTECTOR to avoid corrosion of the existing stainless steel elements in the pool.